


DIN 32676

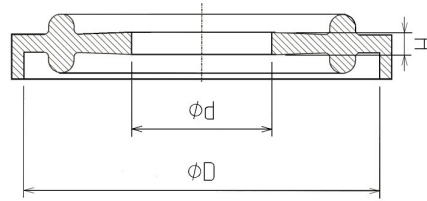

DIN 32676

DN	d BORE	Ø D	Ø H	FLANGE DIA.	EPDM	VMQ	VMQ	FPM	NBR	PTFE
6	6,2	34	2,1	34			*			
8	8,2	34	2,1	34			*			
10	10,2	34	2,1	34	*	*	*	*		*
15	16,2	34	2,1	34	*	*	*	*		*
20	20,2	34	2,1	34	*	*	*	*	*	*
		34	2,1	34	*		*			
25	26,2	50,5	2,1	50,5	*	*	*	*		*
32	32,2	50,5	2,1	50,5	*		*	*		*
40	38,2	50,5	2,1	50,5	*	*	*	*		*
		50,5	2,1	50,5	*		*			*
50	50,2	64	2,1	64	*	*	*	*		*
65	66,2	91	2,1	91	*	*	*	*		
		91	2,1	91	*					
80	81,2	106	2,1	106	*	*	*		*	
100	100,2	119	2,1	119	*	*	*	*		
115	110,3	130	2,1	130						
125	125,2	155	2,1	155	*					
150	150,2	183	2,1	183	*			*		
200	200	233,5	2,1	233,5	*					
250	267,8	286,1	2,1	286,1						
300	318,7	338,5	2,1	338,5						

* Elastomers available

Ordering example: DIN-Nr + DN + Elastomer (DIN 32676 6 VMQ)

Elastomers available:

Elastomer: EPDM – EPDM/400
FDA CFR21:177.2600/USP Class VI
Colour: Black

Elastomer: NBR
FDA CFR21:177.2600
Colour: Black

Elastomer: FPM – FPM/300
FDA CFR21:177.2600/USP Class VI
Colour: Green

Elastomer: VMQ
FDA CFR21:177.2600
Colour: White

Elastomer: VMQ/PLATINUM – VMQ/600
FDA CFR21:177.2600/USP Class VI
Colour: Transparent

Material: PTFE
FDA CFR21:177.1550
Colour: White

WARNING: Limits of application stated herein are standard values. They could be individually transgressed with due consideration to respective service conditions. In the event of a large duty cycle, pulsating operation and other complex operational conditions, simultaneous transgression of these values is not recommended. Due to a large variety of service conditions that may arise in course of actual use, the company does not take responsibility of or guarantee the functional accuracy of the individual components. Rights for changes are reserved.