


DS

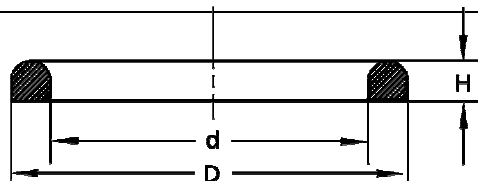

DS

DN	d BORE	Ø D	Ø H	UNION NUT DIA.	EPDM	VMQ	FPM	NBR	PTFE
25	25	31,8	4,5	57	*		*	*	*
38	38	46,8	4,5	71	*	*	*	*	*
51	51	58,7	4,5	86	*	*	*	*	*
63,5	63,5	74,2	4,5	103	*		*	*	*
76,1	76,1	87,6	4,5	115	*	*	*	*	*
101,6	101,6	112,1	4,5	147	*		*	*	*

* Elastomers available

Ordering example: DIN-Nr. + DN + Elastomer (DS 25 EPDM)

Elastomers Available:

Elastomer: EPDM – EPDM/400
FDA CFR21:177.2600/USP Class VI
Colour: Black

Elastomer: NBR
FDA CFR21:177.2600
Colour: Black

Elastomer: FPM
FDA CFR21:177.2600
Colour: Black

Elastomer: VMQ PLATINUM – VMQ/600
FDA CFR21:177.2600/USP Class VI
Colour: Transparent

Material: PTFE
FDA CFR21:177.1550
Colour: White

WARNING: Limits of application stated herein are standard values. They could be individually transgressed with due consideration to respective service conditions. In the event of a large duty cycle, pulsating operation and other complex operational conditions, simultaneous transgression of these values is not recommended. Due to a large variety of service conditions that may arise in course of actual use, the company does not take responsibility of or guarantee the functional accuracy of the individual components. Rights for changes are reserved.