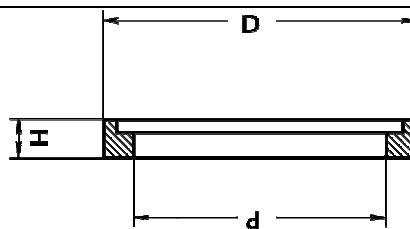


ISO 2853

ISO 2853

DN	d BORE	Ø D	Ø H	UNION NUT DIA.	EPDM	FPM	NBR
25	23,6	32,5	6	48	*	*	*
38	36,6	46	6	64	*	*	*
51	49,6	59,5	6	77	*	*	*
63,5	61,3	73,2	6	91	*	*	*
76,1	73,9	86,5	6	106	*	*	*
101,6	98,6	112,5	6	135	*	*	*

* Elastomers available

Ordering example: ISO-Nr. + DN + Elastomer (ISO 2853 25 FPM)

Elastomers available:

Elastomer:	EPDM - EPDM/400	Elastomer:	FPM
Colour:	FDA CFR21:177.2600/USP Class VI	Colour:	FDA CFR21:177.2600
	Black		Black
Elastomer:	NBR - NBR/001		
Colour:	FDA CFR21:177.2600/USP Class VI		
	Black		

WARNING: Limits of application stated herein are standard values. They could be individually transgressed with due consideration to respective service conditions. In the event of a large duty cycle, pulsating operation and other complex operational conditions, simultaneous transgression of these values is not recommended. Due to a large variety of service conditions that may arise in course of actual use, the company does not take responsibility or guarantee the functional accuracy of the individual components. Rights for changes are reserved.